Installation instruction

ARAT Special mount for Navigation Systems

Part-No.: NS 1094.3
for Chrysler Grand Cherokee Jeep
1999

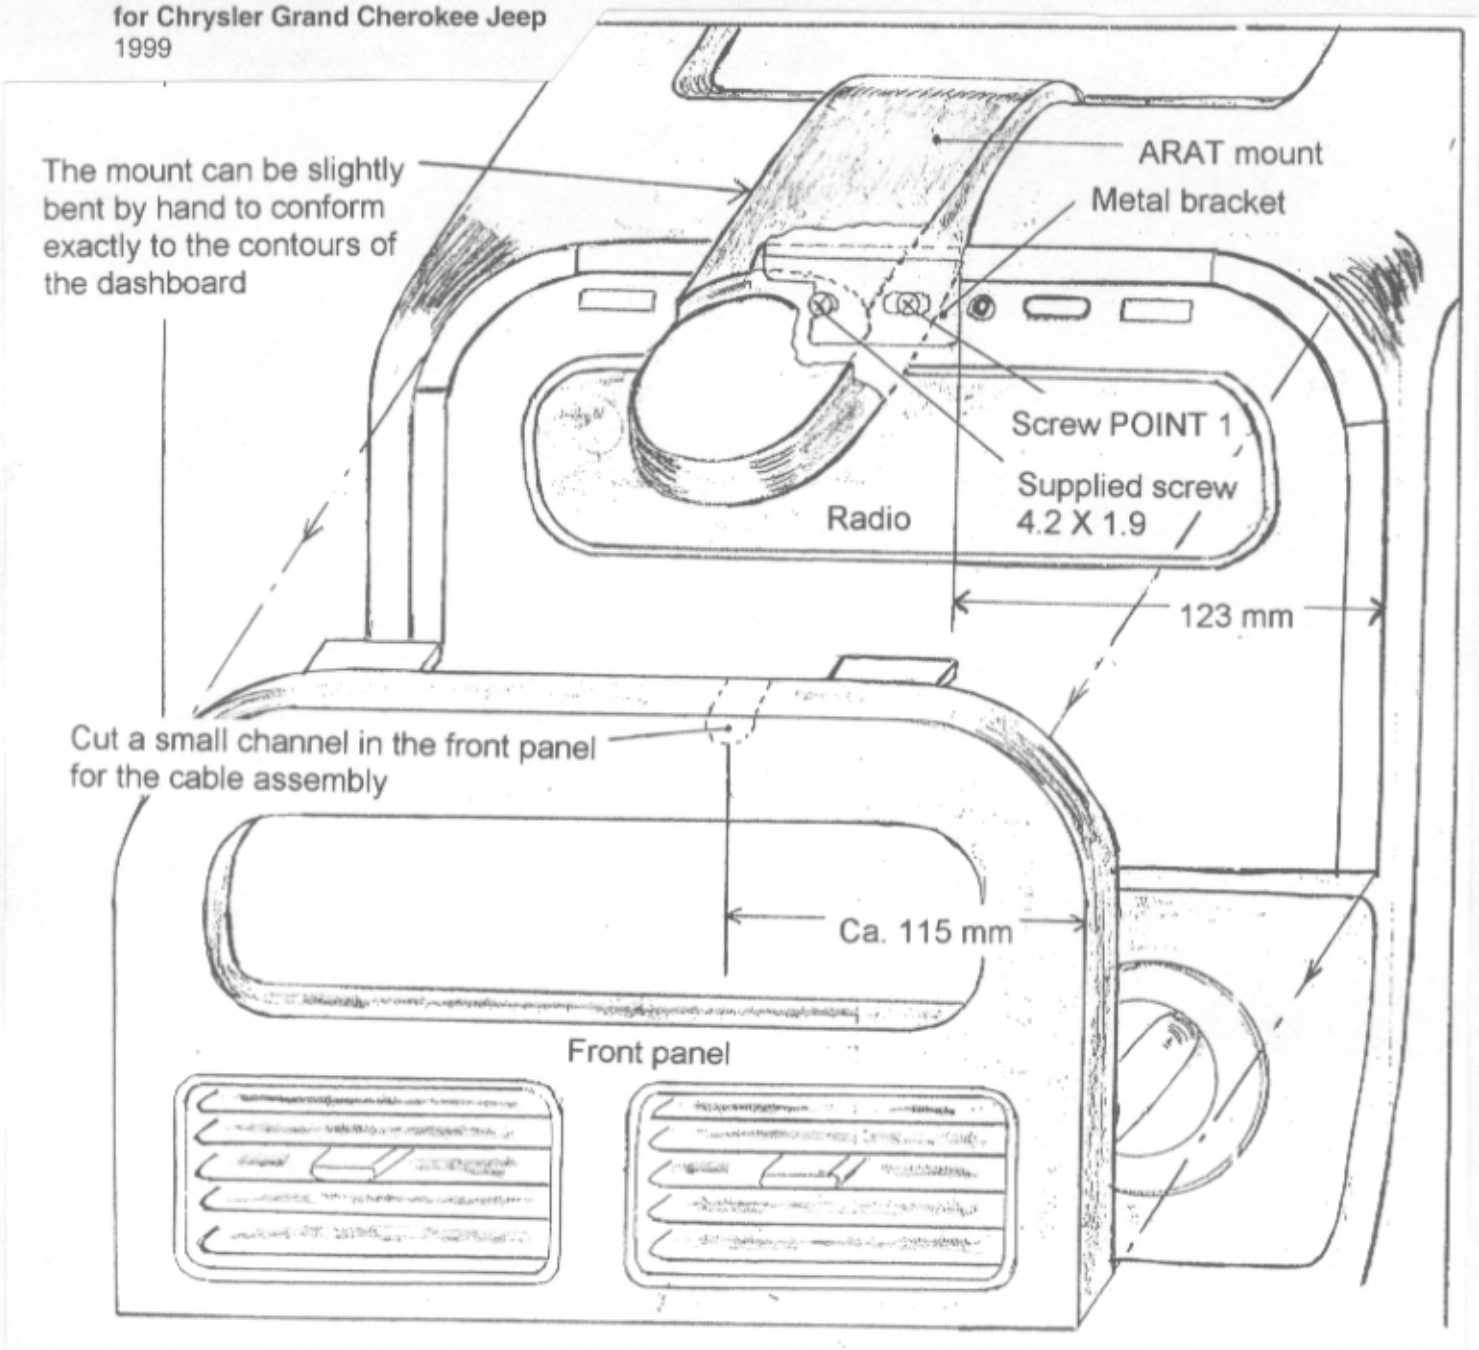
The mount can be slightly bent by hand to conform exactly to the contours of the dashboard
ARAT mount
Metal bracket
Screw POINT 1
Supplied screw 4.2 X 1.9
Radio
123 mm
Cut a small channel in the front panel for the cable assembly
Ca. 115 mm
Front panel

Installation instruction

Remove the front panel from its spring clips, and remove the screw at POINT 1
Place the ARAT mount to the contours of the dashboard (the distance 123mm is important) and the previously removed screw from POINT 1 replace through the metal bracket of the mount, the supplied screw 4.2 X 19 screw into the material of the dashboard through the metal bracket (pre-drill 2 mm ϕ)

Cable channelling:
The cable can be channeled through the front panel by removing a small channel so that the cable can run beside the ARAT mount.

ARAT GmbH-Hauptstrasse-33758 Stukenbrock, Germany Tel: (+49) 5207-8952-52 Fax. (+49) 5207-8952-68
E-mail. info@arat.de Website. www.arat.de